




-  Less Stress. More Focus.
-  Absorb up to 95% of noise that strikes on surface.
-  Highly Customizable.

OPTRA WALL

Optra Wall

CONTROL & REDUCE NOISE!

With Optra wall, you can now create exciting interiors without compromising acoustic performance – even with modern exposed-soffit ceilings.

Optra Acoustical Wall Systems consist of an inner core absorber that absorbs up to 95% of sound striking surface.

It features impaler hook quick-fix installation making them the easiest and quickest absorber wall lining solution around.

Optra Acoustical Wall Systems are ideal for use in commercial, institutional and educational buildings – anywhere noise reduction and sound privacy are a concern.

OPTRA WALL




PHYSICAL DATA

Standard Sizes


Edge	Dimensions (mm)	Nr. of Impaler	Weight
	600 × 600 × 25mm	3	0.9 kg/panel
	600 × 1200 × 25mm	4	1.8 kg/panel
	600 × 1800 × 25mm	4	2.7 kg/panel
	600 × 2100 × 25mm	5	3.2 kg/panel
	600 × 2700 × 25mm	6	4.1 kg/panel

1. Custom sizes available by request.
2. Thickness: Standard 25mm; 40mm for custom only.
3. Impaler to be ordered separately.

Performance

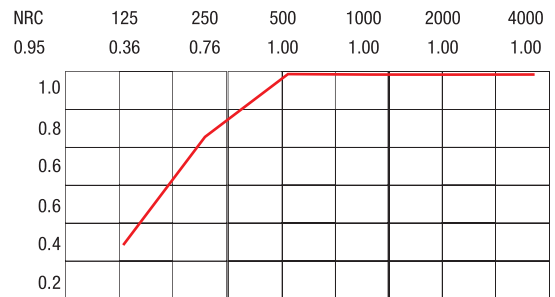

DESIGN PATTERN



Mellow White KS801




Basalt Cream KS805



Tabby Brown KS810



Light Burgundy KS823



Demin Blue KS842



Steel Grey KS848




Straw Beige KS829




Pistachio Green KS832




Marlamade Orange KS833



Ocean Blue KS840



Alloy Grey KS852



Titanium Black KS858

* Due to printing limitations, shades colours may vary from actual product.

For further details, please contact your Local Armstrong Ceilings representative or email asia.support@knaufarmstrong.com

www.knaufarmstrong.com